



## Specification

Communication	Full Duplex SIP Support: SIP2.0(RFC3261)
Audio Code	G.711, G.7321, G.729, G.722
Echo Cancellation Code	G.167 /G.168
Sound Level of Ringing	>90dB(A). 3w speaker
Auxiliary Contact	1Aux output, dry contact.
Rated Load	0.3A at 125VAC, 1A at 30VDC.
Rated Carry Current	1A
DTMF	VoIP SIP Info DTMF RFC2833
LAN Protocols	Power over Ethernet(PoE, 802.3af)
WLAN	IEEE802.3af
Network Access Control	IEEE802.1x
STP	IEEE802.1d, RSTP: IEEE802.1d-2004
Framerate	15fps, H.264 Lens size: 1/4 inch
Field of view	150° horizontal *Opposite 170°
Total Pixels	720P(1280*720) 15fps.
Min. Illumination	0.1lux
MTBF	100,000 hours. MTTR: 2 hours.


## TCM-ITC12SIP/P VoIP Emergency Intercom

SOS intercom is often called emergency intercom, which is mainly used in public places. When an emergency occurs, tourists can use intercom for help. This intercom is a terminal device that transmits voice in both directions via VoIP. It is mainly composed of call button, indicator light, indicating SOS. Intercom can only make Point-to-Point Calls. The device can be installed in schools, colleges, nursing care, highway tolls, tunnel, industries, daycare facilities, and retail shops.

### FEATURES

- HD Camera with night vision.
- VoIP Intercom power supply PoE or 12-24V DC. (Induction loop is an optional)
- Dry relay contact for auxiliary control.
- Crystal tone quality, echo cancellation.
- Lightning protection to ITU-T recommendation K21.
- Ambient Temperature: -30 ~ +70 degree celsius.
- Waterproof grade is IP55/IP66.

### Dimension

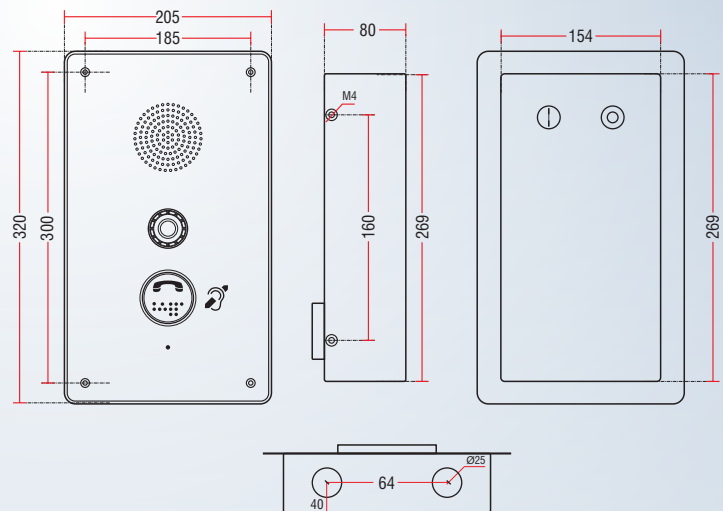

### OPERATION

- Programming and configuration through web GUI.
- Management and operation: DHCP and static IP, remote automatic software upgrade.
- The video intercom is designed for special applications
- where a telephone must be both sturdy and attractive.

### Application



Distributed by